



# RIGHT HEART CATHETERIZATION SHUNT EVALUATION

DAVID STULTZ, MD, FACC

SEPTEMBER 27, 2018

# DATA FROM RIGHT HEART CATH

- Oximetry run
- Pressure data
  - CVP
  - RA
  - RV
  - PA
  - PCWP

# A COMPLETE OXIMETRY RUN

- Left and/or Right PA
- Main PA
- RVOT
- RV mid
- RV TV or apex
- RA low (near TV)
- RA mid
- RA high
- SVC low (near RA junction)
- SVC high (near innominate vein)
- IVC high (just below diaphragm)
- IVC low (at L4-L5)
- LV
- Ao

# THE SIMPLIFIED OX RUN

- PA
- IVC/RA
- FA
- LV/Ao

# SIGNIFICANT STEP UPS

## % SAT

- Mean of distal – mean of proximal
- SVC/IVC → RA                           $\geq 7\%$ 
  - ASD; anomalous pulmonary vein, ruptured sinus of valsava, VSD with TR, coronary-RA fistula
- RA → RV                                   $\geq 5\%$ 
  - VSD; PDA with PR; primum ASD, coronary-RV fistula
- RV → PA                                   $\geq 5\%$ 
  - PDA; aorto-pulmonary window, aberrant coronary origin
- Any step up SVC→PA                           $\geq 7\%$

# MIXED VENOUS O<sub>2</sub> SAT

- In calculations, depends on level of shunt
- RA shunt (ASD)
  - $[3(\text{SVC}) + 1(\text{IVC})] / 4$
- RV (VSD)
  - Average of all RA samples
- PA (PDA)
  - Average of all RV samples


# CALCULATION OF BLOOD FLOW

- $Q_p = \text{O}_2 \text{ consumption} /$   
 $\text{PV O}_2 \text{ content} - \text{PA O}_2 \text{ content}$
- $Q_s = \text{O}_2 \text{ consumption} /$   
 $\text{SA O}_2 \text{ content} - \text{MV O}_2 \text{ content}$

# O<sub>2</sub> CONSUMPTION

- Douglas bag most accurate
  - Never used
- Estimated common (10% error)
  - $125 \text{ mL/m}^2$  ( $110 \text{ mL/m}^2$  for elderly)
  - $\text{BSA} (\text{m}^2) = \text{Sq Root} (\text{wt in kg} * \text{height in cm}) / 3600$
- AV difference (Fick) (5% error)
  - Photodetector technique of expired air
- Cardiac output = O<sub>2</sub> consumption/A-V O<sub>2</sub> oxygen content difference
  - $\text{Hgb} \times 1.36 [\times 10] \times (\text{Arterial O}_2 - \text{Mixed Venous O}_2)$

## EXAMPLE 1

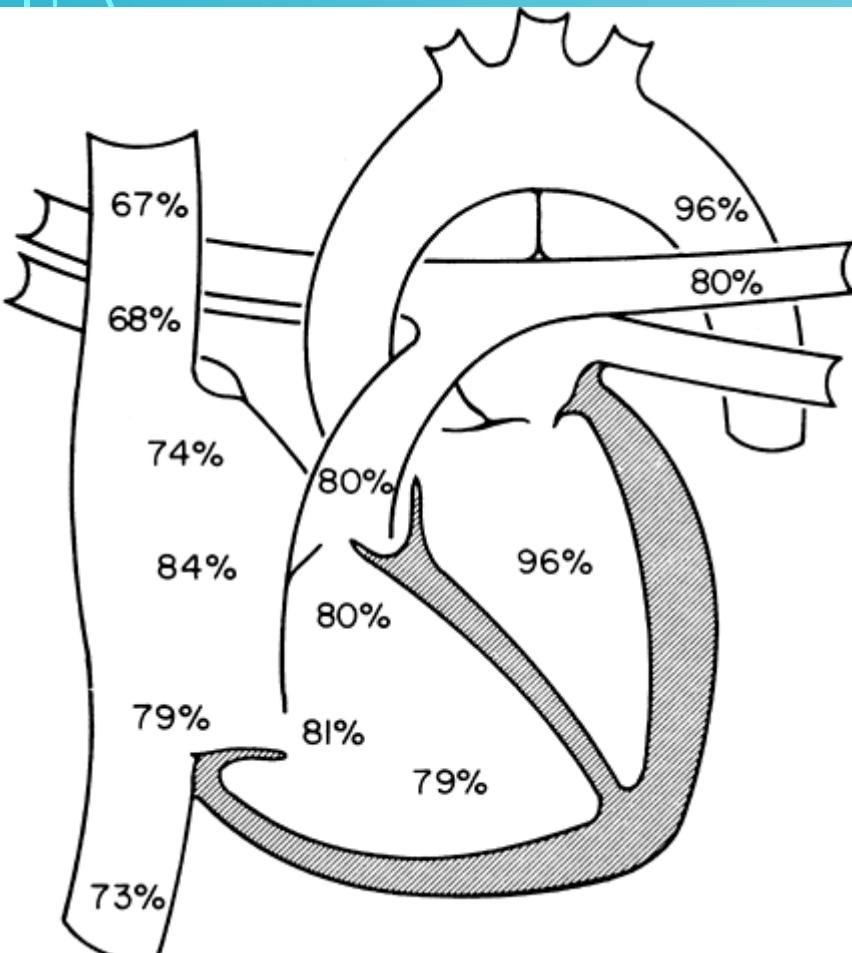

$$\text{BSA} = 1.92 \text{ m}^2$$

$$\text{O}_2 \text{ consumption} = 240 \text{ mL O}_2/\text{min}$$

$$\text{Hgb} = 14 \text{ g/dL}$$

PV O<sub>2</sub> % ?

96%

no R->L ventricular shunt as Ao and LV are same


PVO<sub>2</sub> content =

$$0.96 * 14\text{g}/100\text{mL} * 1.36 \text{ mL O}_2/\text{g}$$

$$0.183 \text{ mL O}_2/\text{mL blood}$$

$$183 \text{ mL O}_2/\text{L}$$

# Example 1

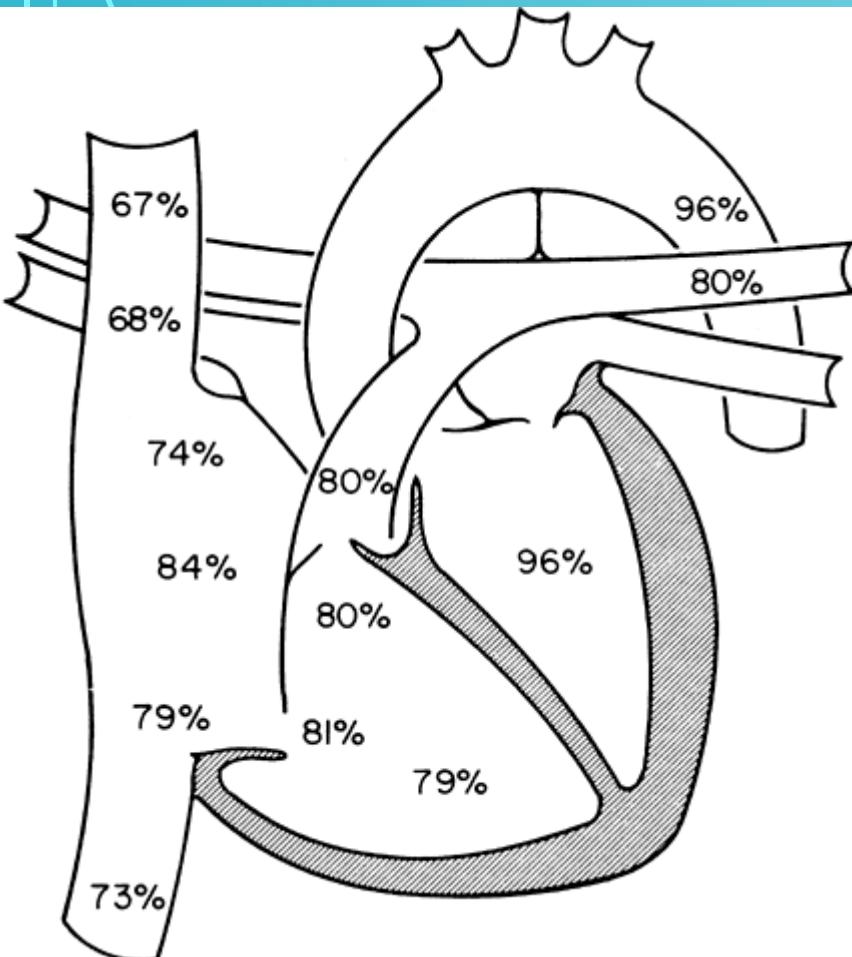

O<sub>2</sub> consumption = 240 mL O<sub>2</sub>/min  
Hgb = 14 g/dL

PA O<sub>2</sub> % ?

80%


PAO<sub>2</sub> content =

$$0.80 * 14\text{g}/100\text{mL} * 1.36 \text{ mL O}_2/\text{g}$$

0.152 mL O<sub>2</sub>/ mL blood

152 mL O<sub>2</sub>/L

# Example 1

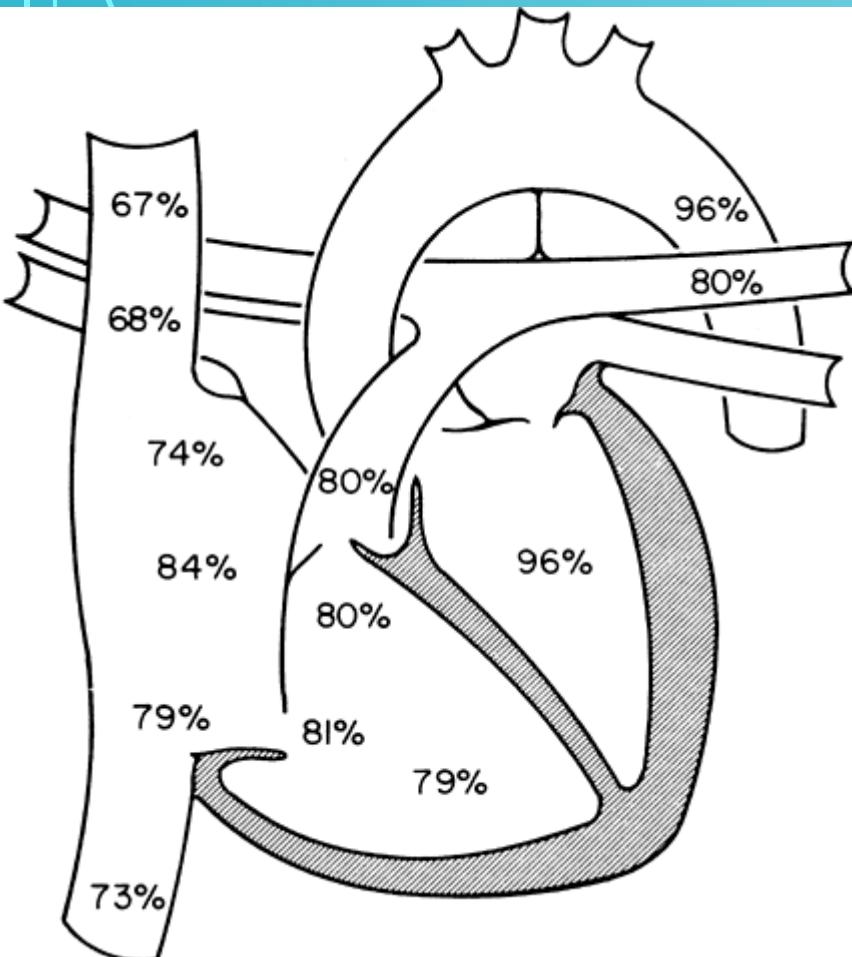

$$\text{O}_2 \text{ consumption} = 240 \text{ mL O}_2/\text{min}$$

$$\text{Hgb} = 14$$

$$\text{PV O}_2 = 183 \text{ mL /L}$$


$$\text{PA O}_2 = 152 \text{ mL /L}$$

Qp?

$$240 \text{ mL O}_2/\text{min} / \\ [183 - 152] \text{ mL/L}$$

$$= 7.74 \text{ L/min}$$

# Example 1

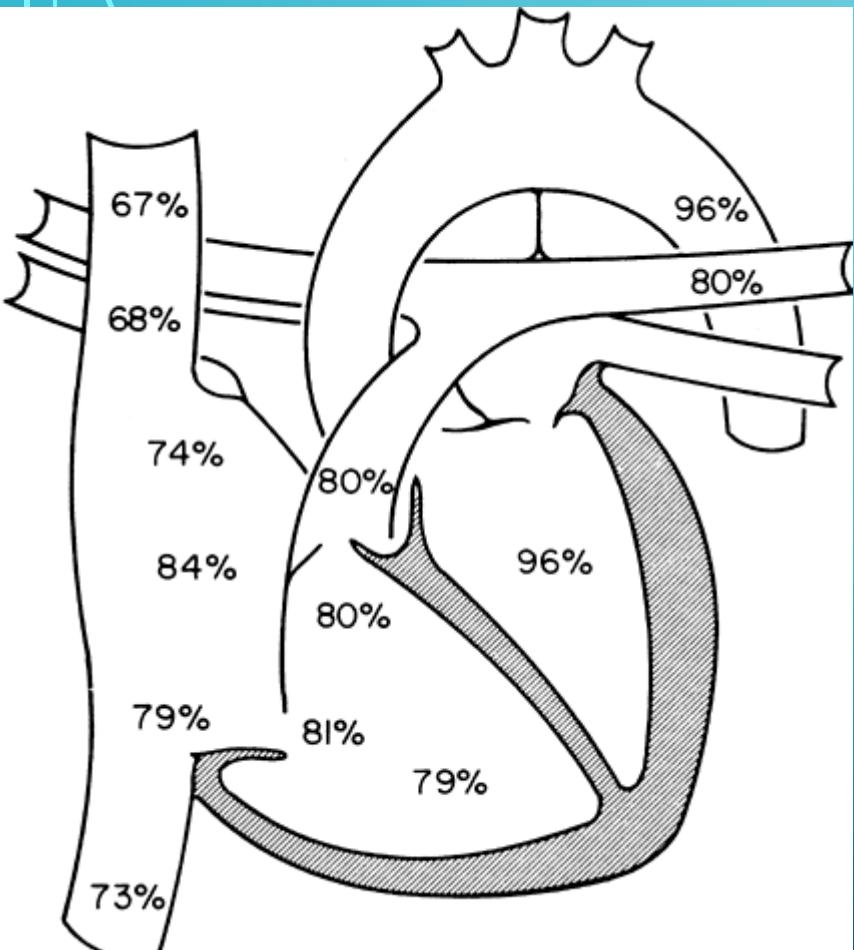

O<sub>2</sub> consumption = 240 mL O<sub>2</sub>/min

Hgb = 14

PV O<sub>2</sub> = 183 mL /L

PA O<sub>2</sub> = 152 mL /L

Qp = 7.74 L/min

Qs?

SA O<sub>2</sub>?

$$0.96 * 14\text{g}/100\text{mL} * 1.36 = 0.183 \text{ mL/mL}$$
$$= 183 \text{ mL/L}$$


MV O<sub>2</sub>?

$$(3 * 67.5) + (73) / 4 = 69$$

$$0.69 * 14/100 * 1.36 = 131 \text{ mL/L}$$

$$Qs = 240/(183 - 131) = 4.6 \text{ L/min}$$

# Example 1

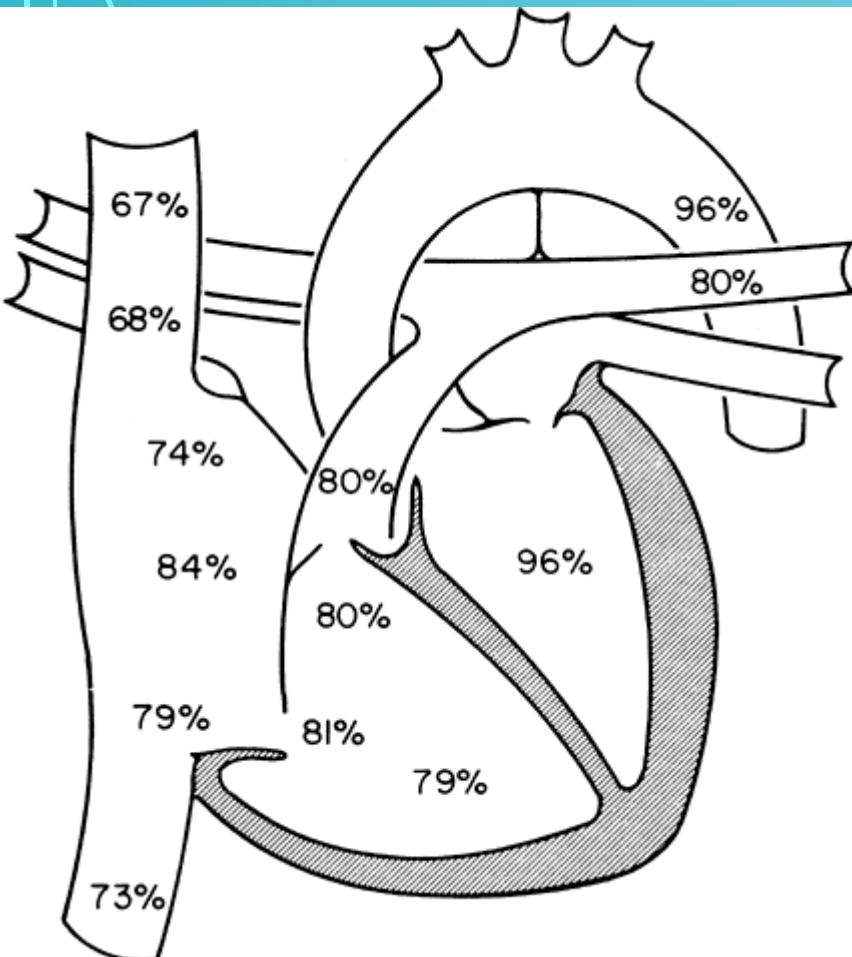

O<sub>2</sub> consumption = 240 mL O<sub>2</sub>/min

Hgb = 14

PV O<sub>2</sub> = 183 mL /L

PA O<sub>2</sub> = 152 mL /L

Qp = 7.74 L/min

Qs = 4.6 L/min

Qp/Qs?

$$7.74/4.6 = 1.68$$

Magnitude of shunt = 3L/min

L → R ASD

# Example 2

$$\text{BSA} = 2.08 \text{ m}^2$$

$$\text{O}_2 \text{ consumption} = 260 \text{ mL O}_2/\text{min}$$

$$\text{Hgb} = 15$$

Qp?

$$\text{PV} = 97\%$$

$$\text{PA} = 88.5\%$$

$$260 / [(97 - 88.5) * 15\text{g}/100\text{mL} * 1.36 * 10]$$

Some Conversions have been built in!

$$\text{Qp} = 15 \text{ L/min}$$

Qs?


$$\text{SA} = 97\%$$

$$\text{MV} = (66 + 64 + 69)/3 = 66\%$$

$$260 / [(97 - 66) * 15/100 * 1.36 * 10]$$

$$\text{Qs} = 4.1 \text{ L/min}$$

$$\text{Qp/Qs} = 15/4.1 = 3.7 \text{ VSD (L} \rightarrow \text{R)}$$

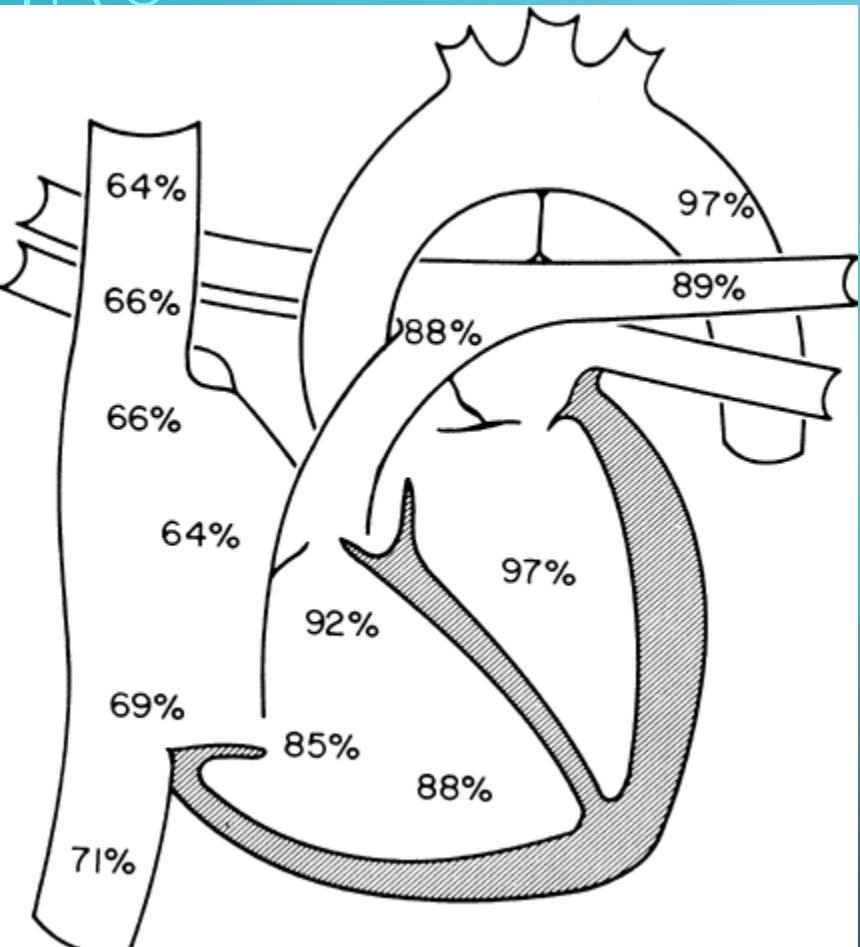


# SIMPLIFIED

- $Q_p = \text{O}_2 \text{ consumption} / (\text{PV O}_2 \text{ content} - \text{PA O}_2 \text{ content})$
- $Q_s = \text{O}_2 \text{ consumption} / (\text{SA O}_2 \text{ content} - \text{MV O}_2 \text{ content})$
- $Q_p/Q_s = (\text{SA} - \text{MV}) / (\text{PV} - \text{PA})$

# BIDIRECTIONAL SHUNT

- Hypothetical Q effective
  - $Q_{eff} = O_2 \text{ consumption} / (PV \ O_2 - MV \ O_2)$
- $L \rightarrow R$  shunt =  $Q_p - Q_{eff}$
- $R \rightarrow L$  shunt =  $Q_s - Q_{eff}$

## EXAMPLE 3

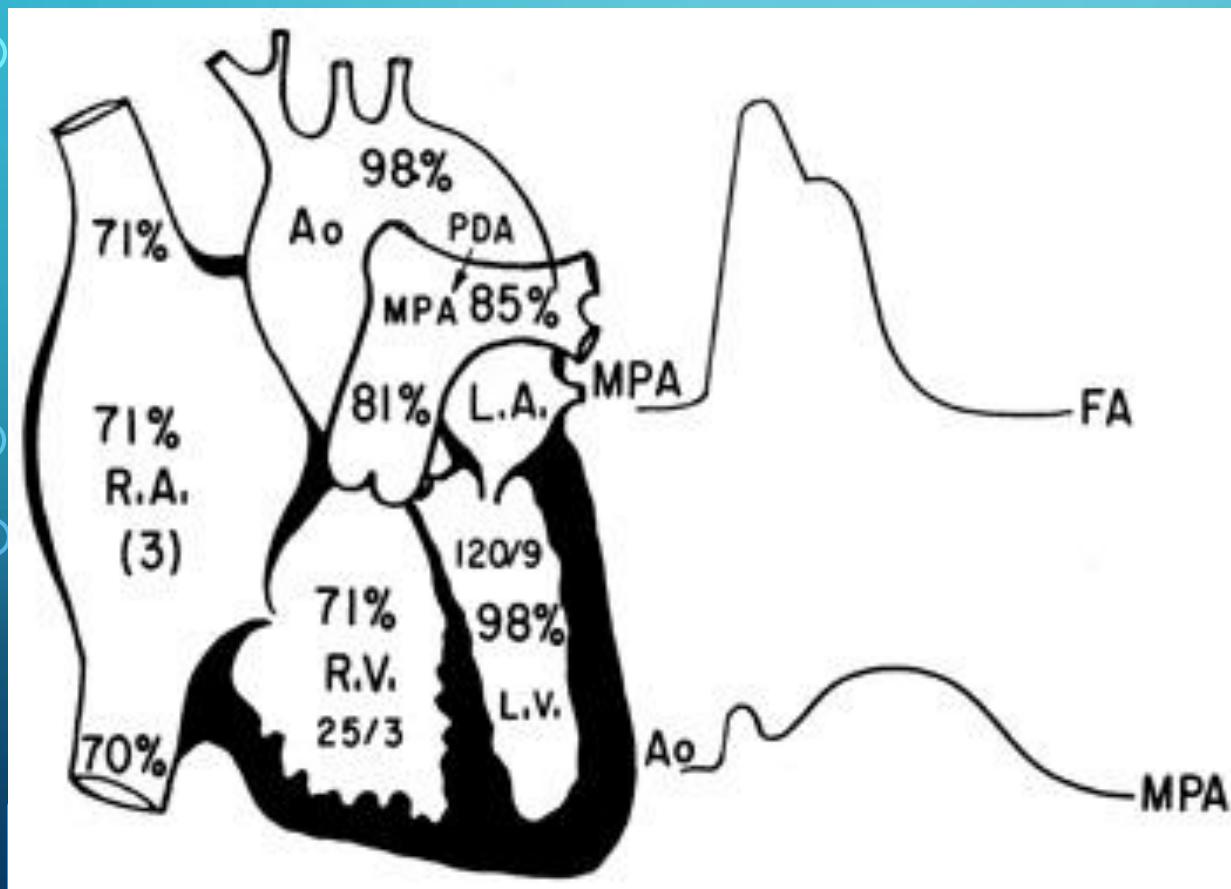

Qp/Qs?

$$[98 - 71] / [85 - 81]$$
$$6.75$$

Where is the shunt?  
PDA

## EXAMPLE 4

- Hgb 13
- BSA = 1.68 m<sup>2</sup>
- FA 92%
- PV 95%
- PA 83%
- Low RA 68%
- Mid RA 85%
- SVC 70%
- IVC 68%

O<sub>2</sub> consumption

210 mL/min

Qp?

$$210/(95-83)*1.36*13/100*10$$
$$10 \text{ L/min}$$

Qs?

$$210/(92-70)*1.36*13/100*10$$
$$5.1 \text{ L/min}$$

Qp/Qs?

1.96

Type of Shunt?

ASD, L → R

# Example 4

- Hgb 13
- O<sub>2</sub> consumption 210 mL/min
- FA 92%
- PV 95%
- PA 83%
- Low RA 68%
- Mid RA 85%
- SVC 70%
- IVC 68%

What if shunt is bidirectional?

$$Q_{eff} = O_2 \text{ cons} / PV - MV$$
$$210/(95-70) * 1.36 * 13/100 * 10$$
$$Q_{eff} = 4.75 \text{ L/min}$$

$$Q_p = 10 \text{ L/min}$$
$$Q_s = 5.1 \text{ L/min}$$

$$L \rightarrow R = Q_p - Q_{eff}$$
$$10 - 4.75 = 5.25$$
$$R \rightarrow L = Q_s - Q_{eff}$$
$$5.1 - 4.75 = 0.35$$

## EXAMPLE 5

- Hgb = 15
- BSA =  $1.56 \text{ m}^2$
- FA 89%
- LA 88%
- PV 96%
- PA 82%
- Low RA 82%
- Mid RA 83%
- SVC 81%
- IVC 70%
- **O<sub>2</sub> consumption =**  
195 mL/min

Where is the step up?  
IVC → RA

What about a step down?  
PV → LA

What is this?

- ASD
- anomalous pulmonary vein
- ruptured sinus of valsava
- VSD with TR
- coronary-RA fistula

# Example 5

Hgb = 15

- O<sub>2</sub> consumption = 195 mL/min
- FA 89%
- LA 88%
- PV 96%
- PA 82%
- Low RA 82%
- Mid RA 83%
- SVC 81%
- IVC 70%

Calculate for bidirectional shunt

$$Q_{eff} = O_2 \text{ cons} / PV - MV$$

$$Q_{eff} = 195/(96-[70+3*81]/4) * 1.36 * 15/100 * 10$$

$$Q_{eff} = 5.4 \text{ L/min}$$

$$Q_p = 195/(96-82) * 1.36 * 15/100 * 10$$

$$Q_p = 6.8 \text{ L/min}$$

$$Q_s = 195/(89-78) * 1.36 * 15/100 * 10$$

$$Q_s = 10.6 \text{ L/min}$$

$$L \rightarrow R = 6.8 - 5.4 = 1.4 \text{ L/min}$$

$$R \rightarrow L = 10.6 - 5.4 = 5.2 \text{ L/min}$$